
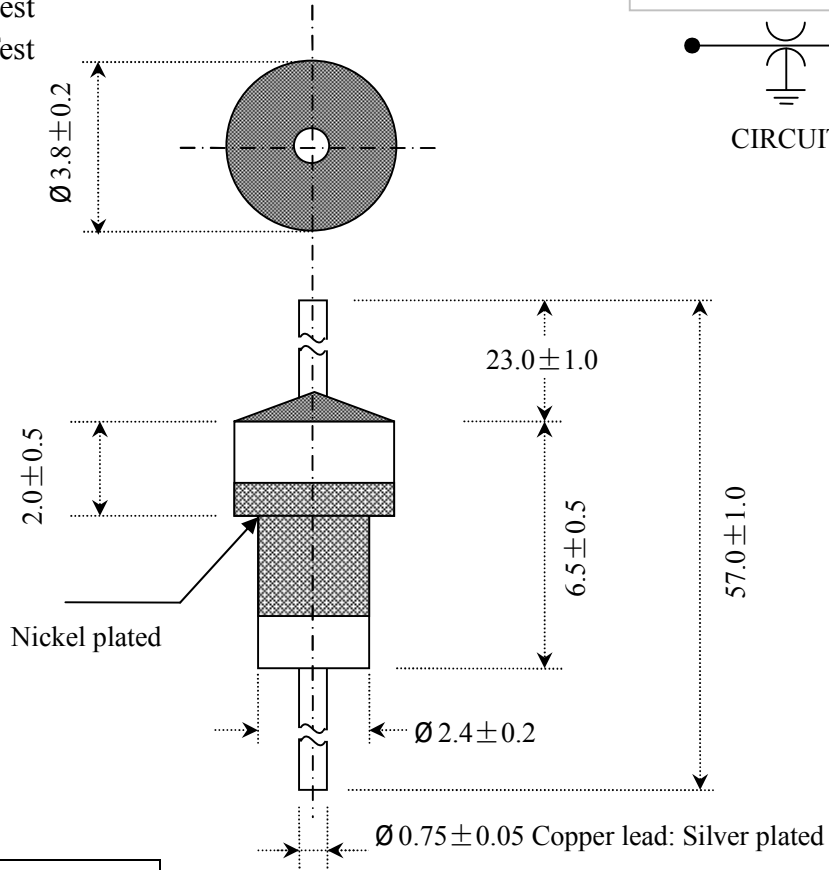



# Sales Drawing

## Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.



SPECIFICATIONS	
Capacitance	2000pF
Dissipation Factor	< 3.5%
Capacitance Tolerance	-20%+80%
Temp Characteristics	Y5U
Rating Voltage	100VDC
DWV	300VDC
Current	7A
I.R.100vdc	$\geq 3000M \Omega$
Operating Range	-25°C+85°C

### Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

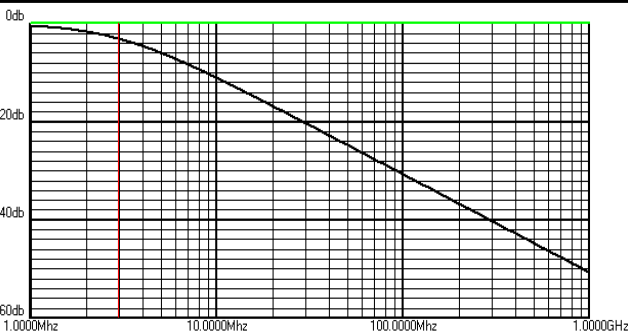

### -Tolerances-

Soldering Temp:  $\leq 300^\circ\text{C}$

Soldering Time: 3sec

**LCA**  
**Micronics**

Unit: (mm)

**LCA**<sup>®</sup>

**H3822-007**