
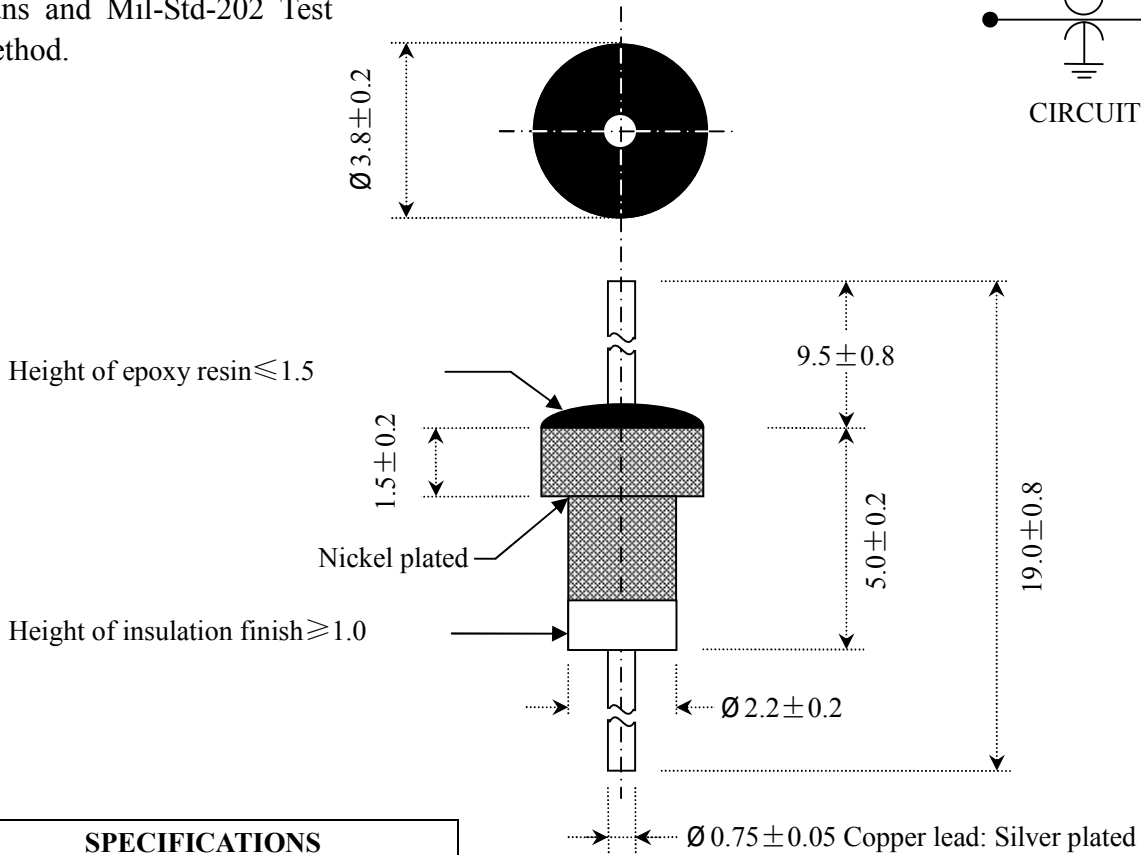



# Sales Drawing

## Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.



SPECIFICATIONS	
Capacitance	1000pF
Dissipation Factor	≤ 3.5%
Capacitance Tolerance	-20%+80%
Temp Characteristics	X7R
Rating Voltage	100VDC
DWV	300VDC
Current	7A
I.R.100vdc	3000MΩ
Operating Range	-55°C+125°C

### Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

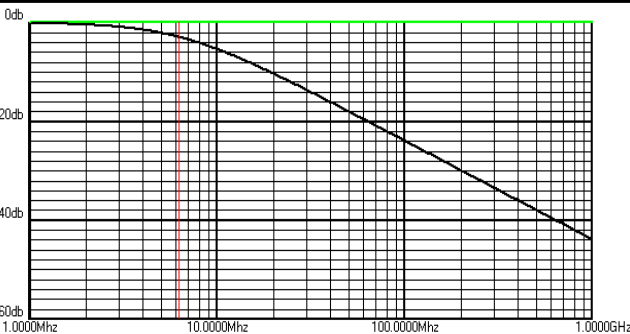

### -Tolerances-

Soldering Temp: ≤ 300°C

Soldering Time: 3sec

**LCA**  
**Micronics**

Unit: (mm)

**LCA**<sup>®</sup>

**H3822-012**