
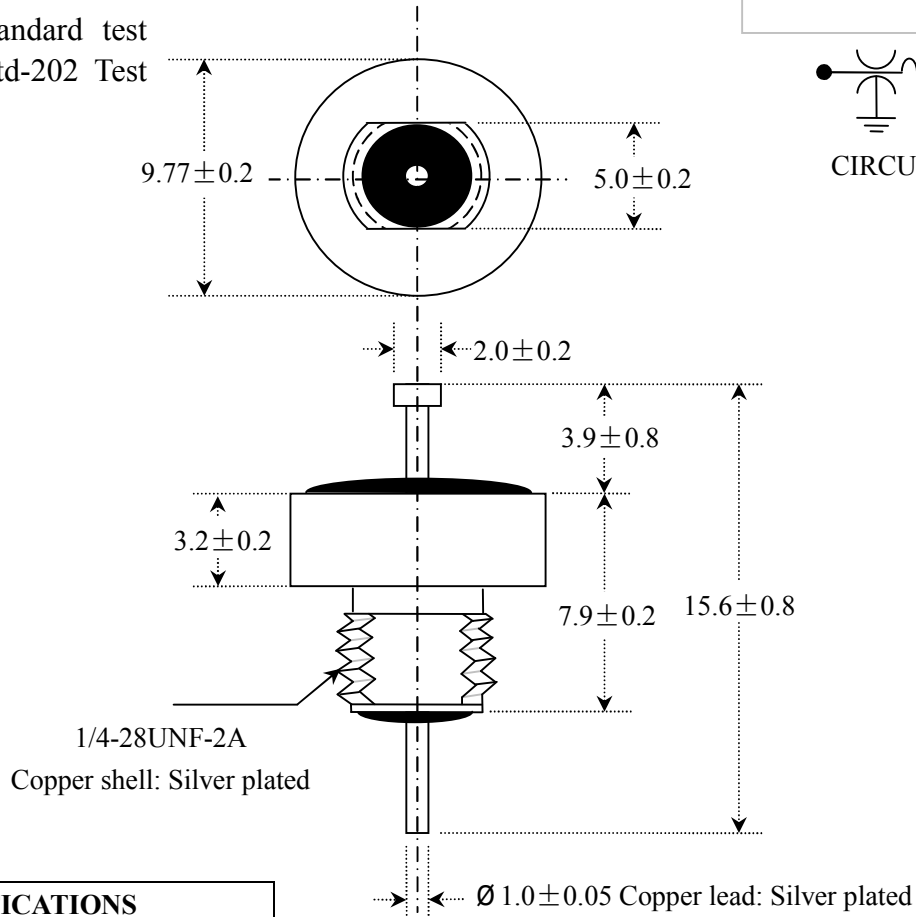



Sales Drawing

Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.



SPECIFICATIONS	
Capacitance	1.4uF
Dissipation Factor	<3.5%
Capacitance Tolerance	-20%+20%
Temp Characteristics	X7R
Rating Voltage	50VDC
DWV	150VDC
Current	15A
I.R.100vdc	3000MΩ
Operating Range	-55°C+125°C

Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

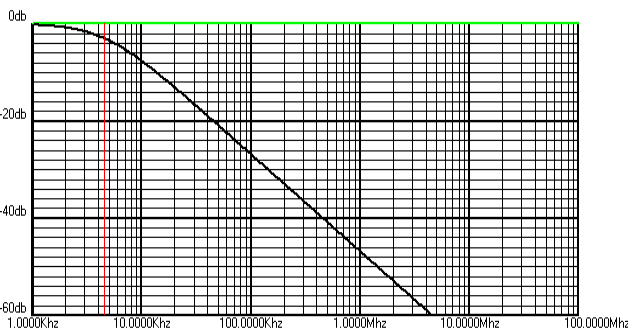

Install Torque

9kgf • cm

Soldering Temp: ≤300°C

Soldering Time: 3sec

LCA

Micronics

Unit: (mm)

LCA®

L1/4-28UNF-2A-001