
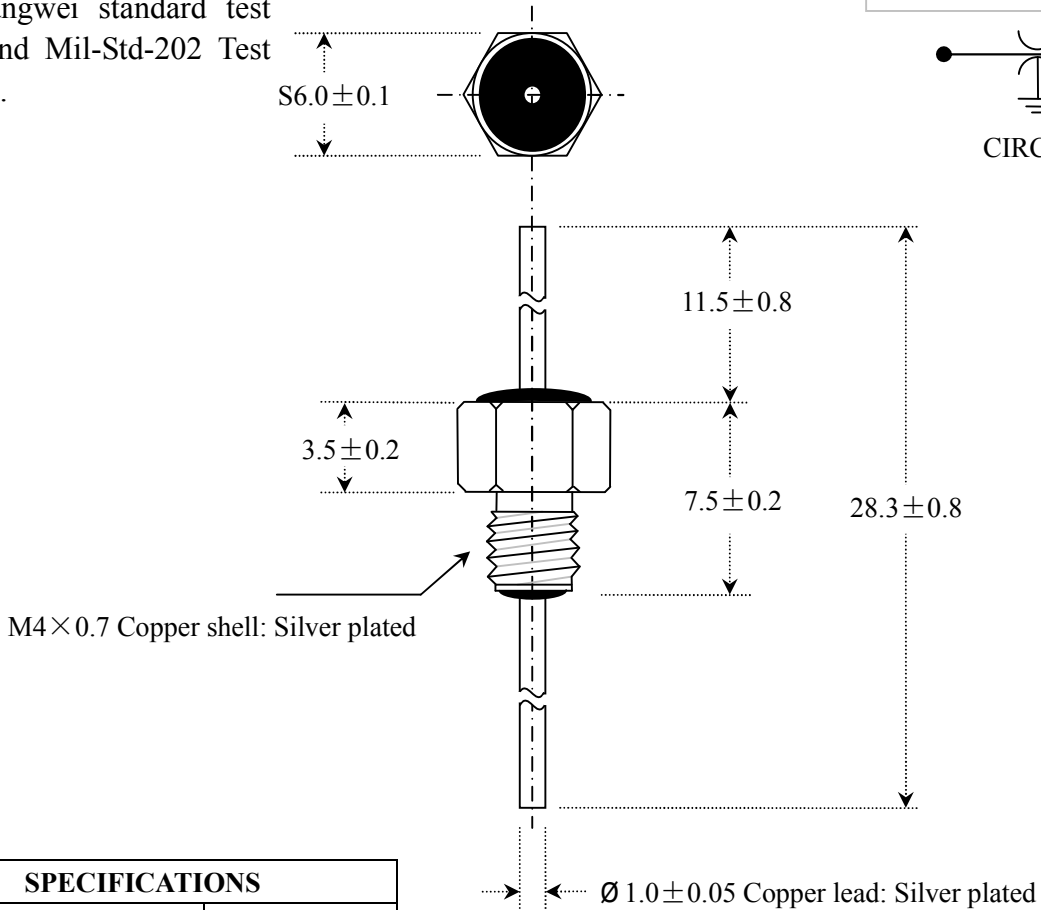



Sales Drawing

Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.



SPECIFICATIONS	
Capacitance	0.1uF
Dissipation Factor	< 3.5%
Capacitance Tolerance	-20%+20%
Temp Characteristics	X7R
Rating Voltage	100VDC
DWV	300VDC
Current	10A
I.R.100vdc	3000MΩ
Operating Range	-55°C+125°C

Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

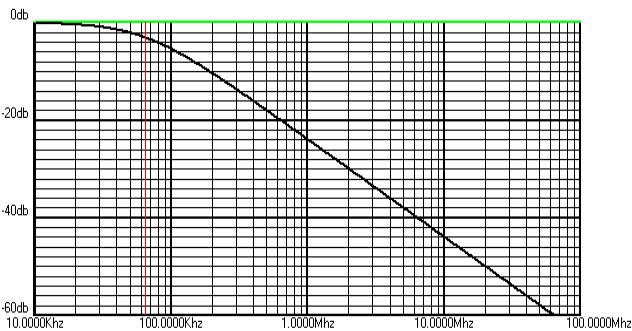

Install Torque 7kgf · cm	LCA Micronics
Soldering Temp: ≤300°C	
Soldering Time: 3sec	Unit: (mm)
LCA[®]	L6040-010