
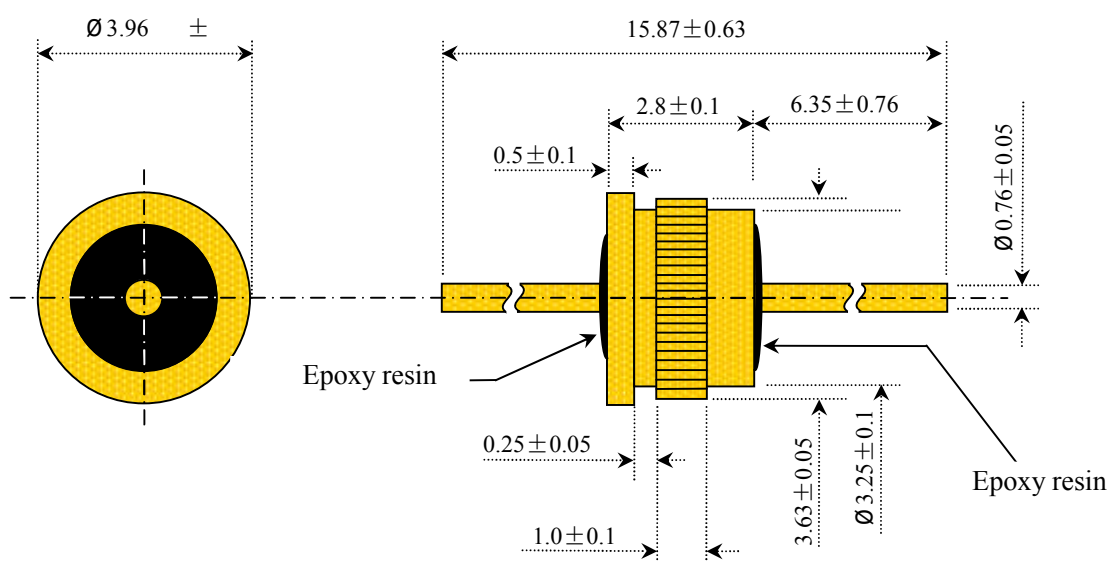


Sales Drawing

Electrical Testing

As Xiangwei standard test plans and Mil-Std-202 Test Method.




SPECIFICATIONS

Capacitance	100pF
Dissipation Factor	<3.5%
Capacitance Tolerance	-20%+20%
Temp Characteristics	SL
Rating Voltage	200VDC
DWV	500VDC
Current	7A
I.R.100vdc	10000M Ω
Operating Range	-55°C+125°C

Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

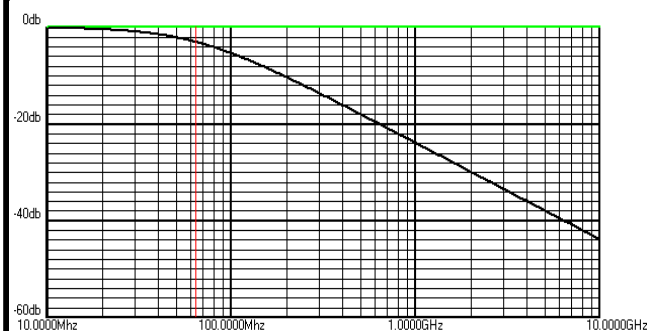

-Tolerances-

Soldering Temp: $\leq 300^{\circ}\text{C}$

Soldering Time: 3sec

LCA[®]

LCA
Micronics

Unit: (mm)

Q4033-001