
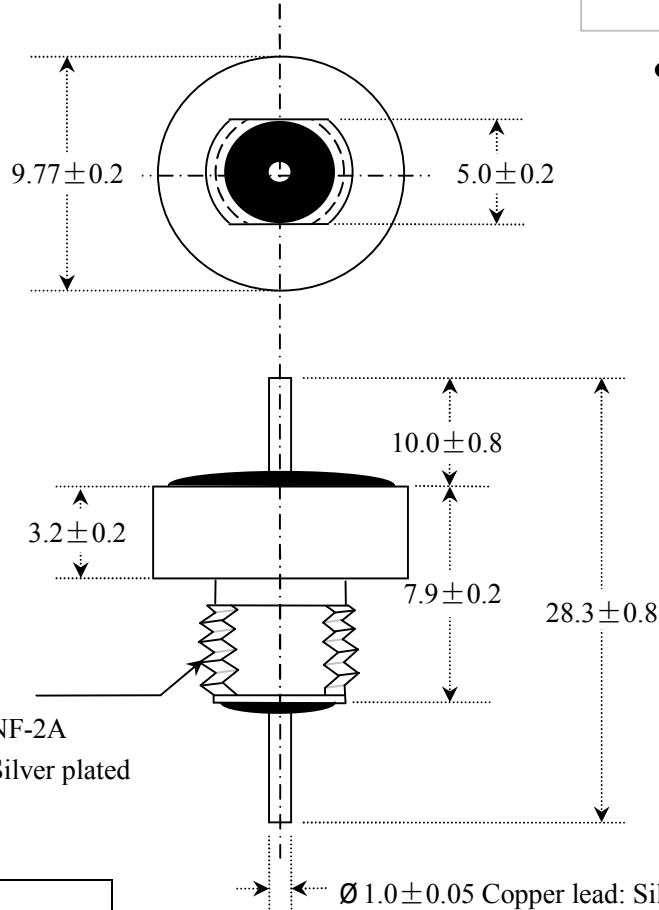



# Sales Drawing

## Electrical Testing

As Xiangwei standard test plans and Mil-Std-202 Test Method.




### SPECIFICATIONS

<b>Capacitance</b>	0.01uF
<b>Dissipation Factor</b>	< 3.5%
<b>Capacitance Tolerance</b>	-20%+20%
<b>Temp Characteristics</b>	X7R
<b>Rating Voltage</b>	100VDC
<b>DWV</b>	300VDC
<b>Current</b>	10
<b>I.R.100vdc</b>	3000MΩ
<b>Operating Range</b>	-55°C+125°C

### Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

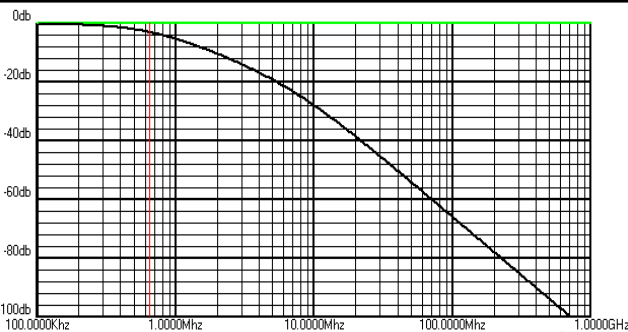

**Install Torque**

**9kgf • cm**

Soldering Temp: ≤ 300°C

Soldering Time: 3sec

**LCA**

**Micronics**

Unit: (mm)

**LCA**

**L1/4-28UNF-2A-003**