
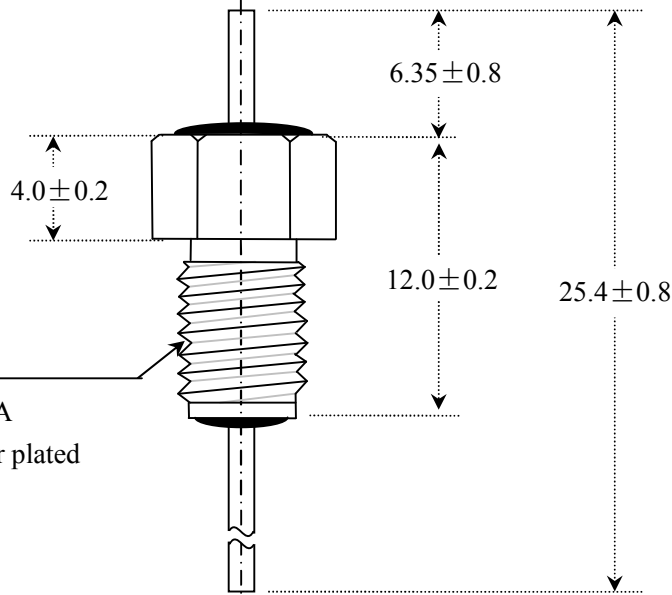



Sales Drawing

Electrical Testing

As Xiangwei standard test plans and Mil-Std-202 Test Method.

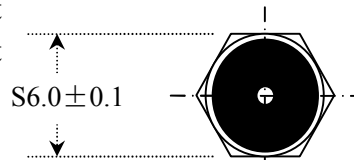

12-28UNF-2A
Copper shell: Silver plated


Ø 1.2±0.05 Copper lead: Silver plated

SPECIFICATIONS

Capacitance	10000pF
Dissipation Factor	<3.5%
Capacitance Tolerance	-20%+80%
Temp Characteristics	X7R
Rating Voltage	250VDC
DWV	750VDC
Current	15A
I.R.100vdc	10G Ω
Operating Range	-55°C+125°C

Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

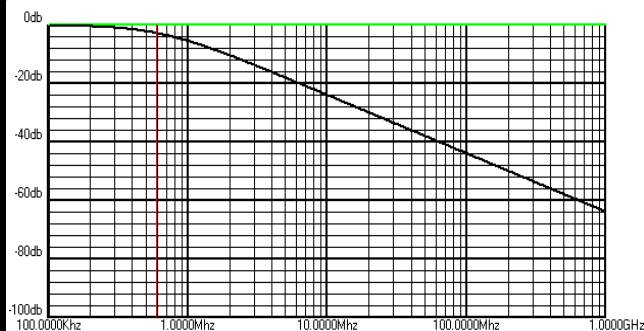

Install Torque

9kgf • cm

Soldering Temp: ≤300°C

Soldering Time: 3sec

LCA

Micronics

Unit: (mm)

LCA®

L12-28UNF-2A-001