Sales Drawing



Electrical Testing
As Xiangwei standard test plans and Mil-Std-202 Test Method.



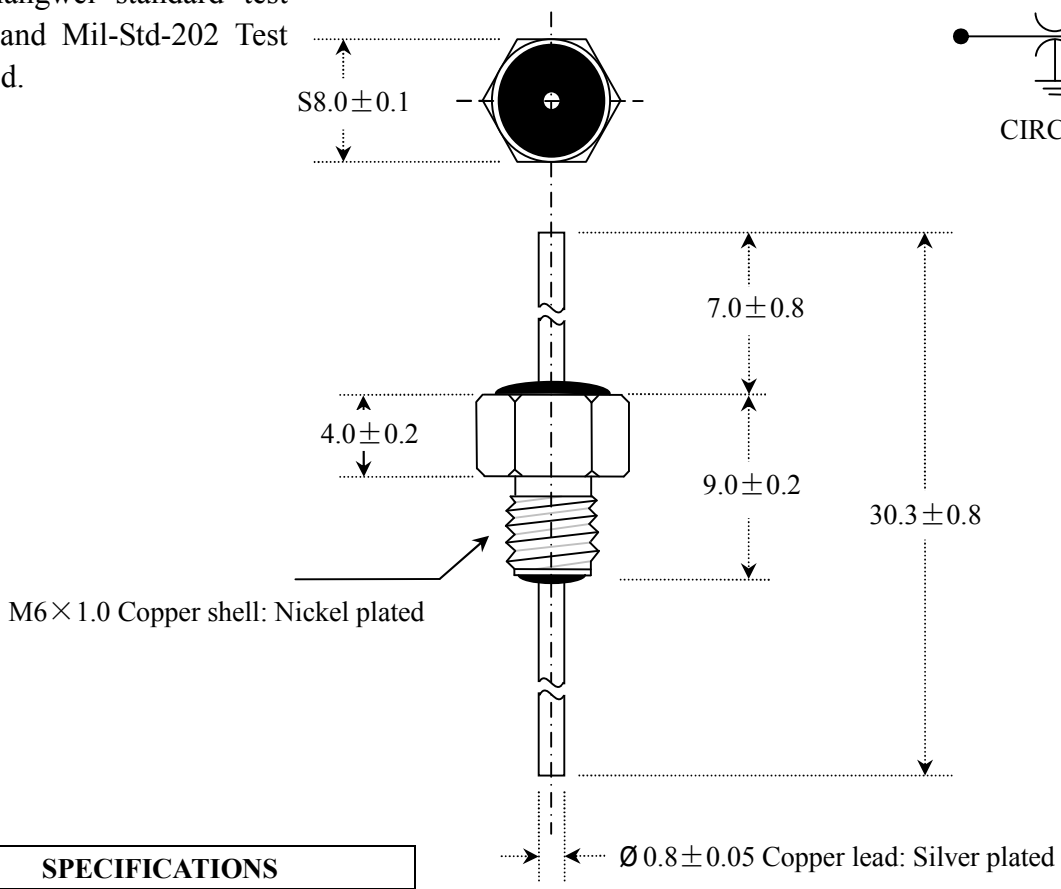

SPECIFICATIONS	
Capacitance	4700pF
Dissipation Factor	＜3.5%
Capacitance Tolerance	-20%+80%
Temp Characteristics	X7R
Rating Voltage	50VDC
DWV	150VDC
Current	7A
I.R.100vdc	3000MΩ
Operating Range	-55℃+125℃

Notes：

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

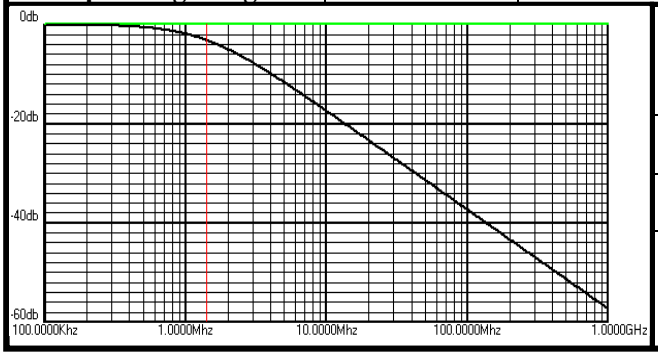

Install Torque 9kgf • cm	**LCA Micronics**
Soldering Temp：≤300℃	
Soldering Time：3sec	Unit：(mm)
LCA®	**L8060-003AN**