
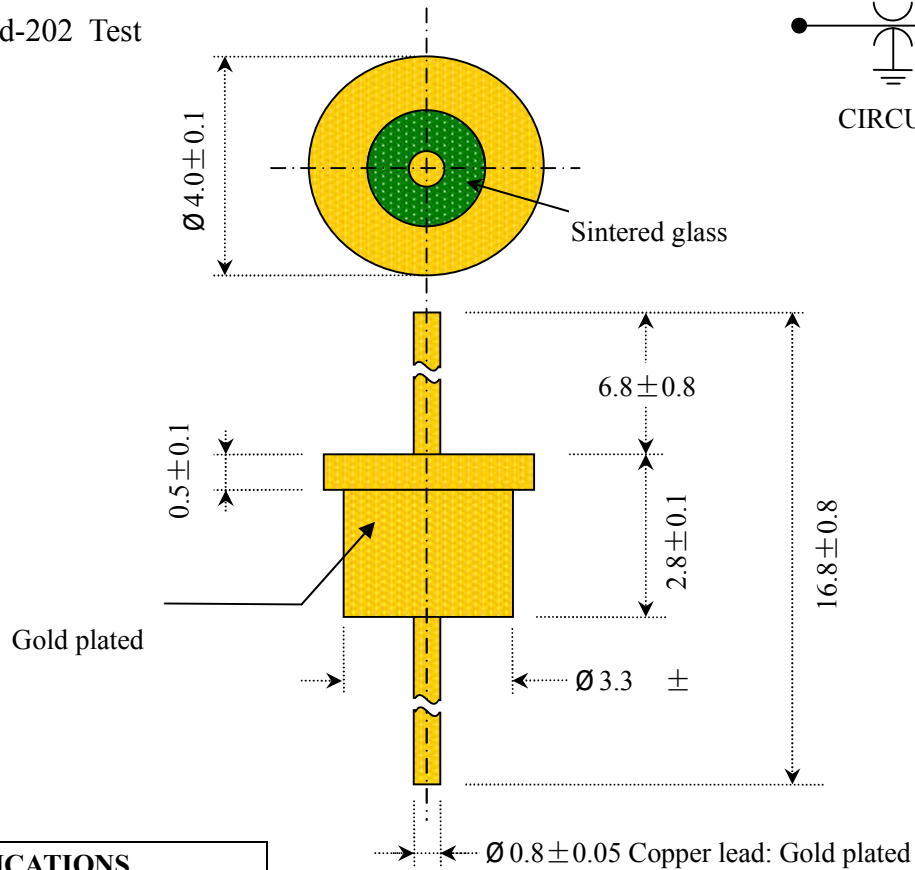



Sales Drawing

Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.



SPECIFICATIONS	
Capacitance	1000pF
Dissipation Factor	< 3.5%
Capacitance Tolerance	-20%+20%
Temp Characteristics	X7R
Rating Voltage	50VDC
DWV	150VDC
Current	7A
I.R.100vdc	10G Ω
Operating Range	-55°C+125°C

Notes:

1. Do not use a hard object beat capacitor body.
2. Storage: Usual temperature by sealed.
3. Soldering: Using constant electric iron soldering, and don't use furnace welding and dip soldering methods.
4. ROHS Part (Lead free).

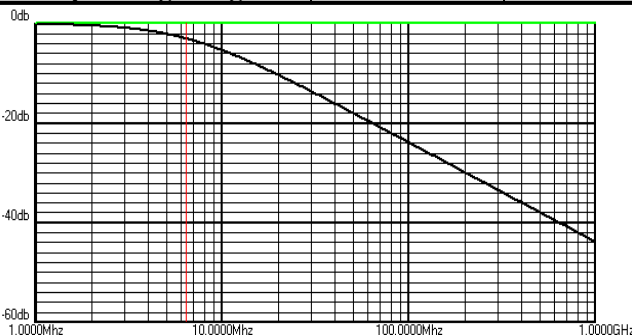

-Tolerances-

Soldering Temp: $\leq 300^{\circ}\text{C}$

Soldering Time: 3sec

LCA[®]

**LCA
Micronics**

Unit: (mm)

H2618-007